


ECO-GRES™ ASIA

COVERINGSETC

STANDARD

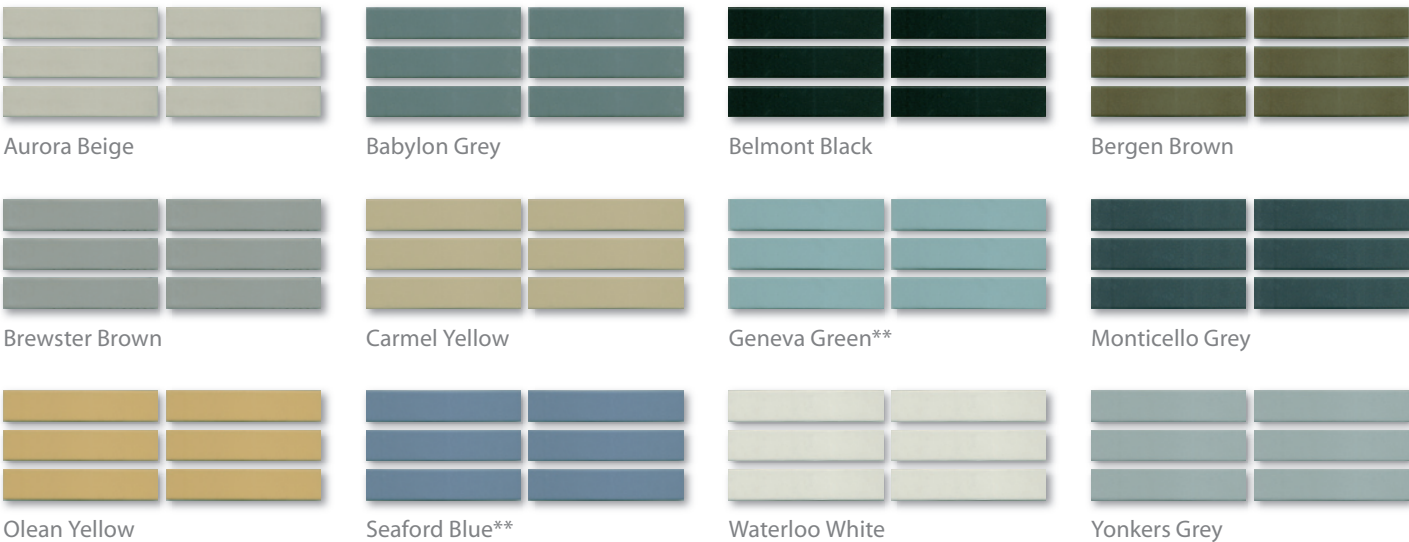


OVERVIEW

Encounter the perfect blend of ‘eco’ and ‘upscale’ with Eco-Gres™ tiles and mosaics. ECO-GRES™ Asia is a Future-Friendly™ material made of through-body, unglazed porcelain. Highly sustainable, easy to install and maintain. Slip resistant, scratch resistant, stain and fade resistant. No need to seal or wax. Contains pre-consumer recycled content; may help contribute toward LEED® credits with USGBC project certification.

AVAILABLE SIZES

1" x 6" tiles mounted on 12" x 12" sheet in grid or brick pattern\*  
3" x 6" tiles



SPECIFICATIONS

Water absorption	ASTM C-373	ISO 10545-3	>0.1%
Breaking Strength		ISO 10545-4	1800 N
Modulus of Rupture	ASTM C-99	ISO 10545-4	50 N/mm <sup>2</sup>
Abrasion Resistance	ASTM C-501	ISO 10545-7	128 mm <sup>3</sup>
Linear Thermal Expansion	ASTM E-228	ISO 10545-8	6,6 x 10 <sup>-6</sup> C-1
Thermal Shock Resistance	ASTM C-484	ISO 10545-9	Conforms
Coefficient of Friction	ASTM C-1028		Dry 0.89, Wet 0.75
Stain Resistance		ISO 10545-12	No permanent stains
Chemical Resistance		ISO 10545-13	Conforms



\* Brick pattern is a special order item  
\* Only standard colors available in 3" x 6"  
\* Approximate laboratory test values.  
\* Colors may not print accurately. Please request sample.

